

FIG. 1

```

<HTML>
<!-- sample.html -- Example of html input file for Generic CGI Handling.
<!--
<!-- MANUFACTURING -- OPERATOR COUNT REQUEST FORM.      George Te, 11/21/2000
<!--
<!--
<HEAD><TITLE>HTML input file for Generic CGI Handling<TITLE></HEAD>
<BODY text="0000A0">
<FORM NAME= "sample" METHOD = "POST" ACTION="gencgib.cgi?sample">
<BR><FONT SIZE=6> Manufacturing - Operator Count </FONT>
<HR><BR>
<TABLE BORDER CELLPADDING=5>
  <TR>
    <TD>User Id <BR><INPUT TYPE=text NAME="user" SIZE=15 value=$userid ></TD>
    <TD>Factory <BR><INPUT TYPE=text NAME="fact" SIZE=15 value="0" ></TD>
    <TD COLSPAN=2>Current Plan ID<br>
    <SELECT NAME="plan">
      <OPTION VALUE="planA1" SELECTED > Plan-A
      <OPTION VALUE="planD1">T1 Plan-T
      <OPTION VALUE="planE1">U1 Plan-E
      <OPTION VALUE="planF1">V1 Plan F
    </SELECT>
  <TD> Product ID <BR><INPUT TYPE=text NAME="prod" SIZE=15 value="ALL" >
  <TD> Station <BR><INPUT TYPE=text NAME="slan" SIZE=15 value="ALL" >
  <TD> Machine <BR><INPUT TYPE=text NAME="mach" SIZE=15 value="ALL" >
  <TD> Categories <BR><INPUT TYPE=text NAME="catg" SIZE=15 value="" >
  <TD> Center <BR><INPUT TYPE=text NAME="cent" SIZE=15 value="" >
  <TD> Processes <BR><INPUT TYPE=text NAME="procs" SIZE=15 value="ALL" >
</TABLE><BR>
  
```

```

<HR>
  Operators: (Please select one) <BR>
  <INPUT TYPE="Radio" Name="actn value="a1 Operator Demand
  <INPUT TYPE="Radio" Name="actn value="a2 Oper_Starts" CHECKED
  <BR>
  <INPUT TYPE=submit NAME="submitButton" VALUE="Submit"> ~203
  <INPUT TYPE=reset NAME="resetbutton" VALUE="Reset">
</FORM>

<SCRIPT language = JavaScript >
<!--
  document.sample.fact.focus() ;
</SCRIPT>
<!-- EMAIL_SEND: Y      (N-Don't send; Y- send per EMAIL_RECEIVER.) -->
<!--
<!-- EMAIL_RECEIVER:   te@us.ibm.com
<!-- EMAIL_RECEIVER:   gte@vnet.ibm.com
<!-- PROGRAM:         /ats/fishkill/data/fac/pqr/mmm555/countopr.exec
<!-- =====
<!-- KEYS:
<!-- 1. email_send -- to send results to recipients or not.
<!-- 2. email_receiver -- email addresses of receivers of output files.
<!-- 3. program -- programs that genogib.cgi will call. If 2nd
<!-- word is '&', then execute detached. 'NO&' or blank
<!-- means execute at called point. Calling program waits
<!-- for results.
<!-- =====
</body> </html>

```

FIG. 2 (continued)

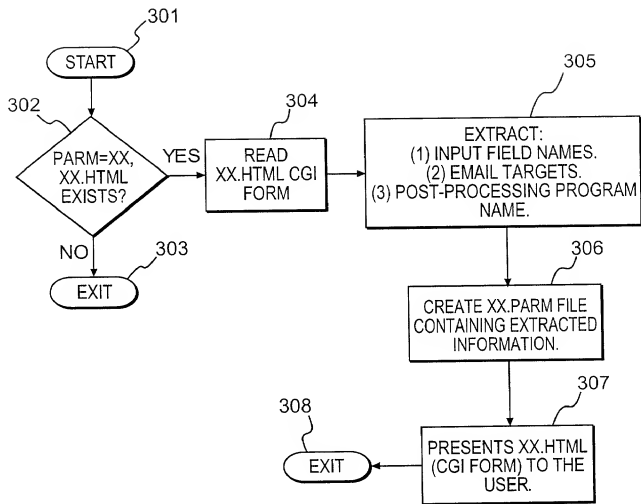


FIG. 3

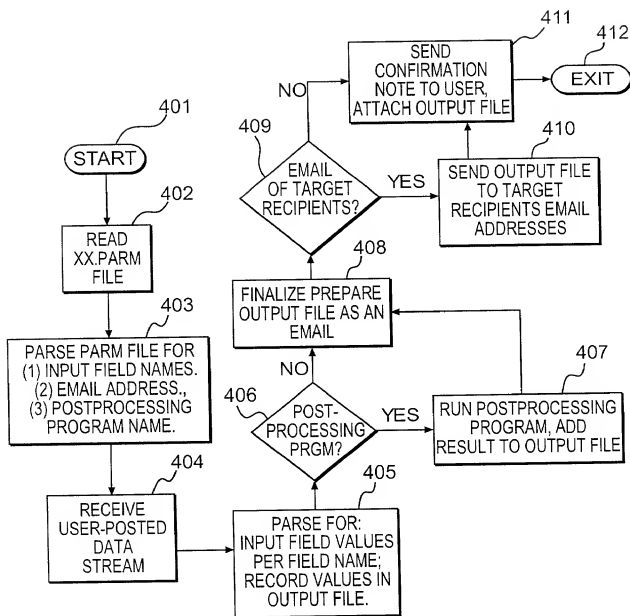


FIG. 4

FIG. 6

CONFIRMATION RESPONSE TO THE USER.

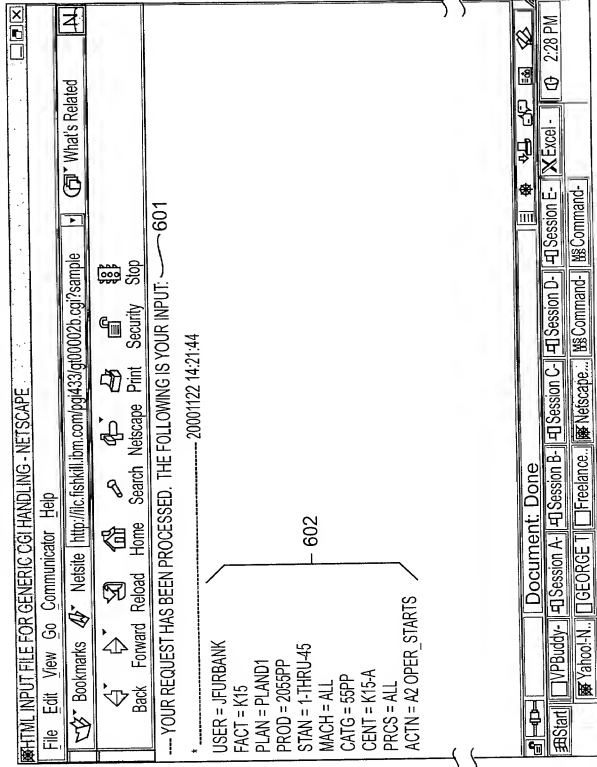


FIG. 7

OUTPUT FILE EMAILED TO TARGET RECIPIENT(S).

100000-0000000000

1 A NOTE FROM SYSTEM ON WED NOV 22 14:17:53 2000 - LOTUS NOTES

File Edit View Help

NEW MEMO DELETE FILE FORWARD REPLY REPLY HISTORY ADD SENDER TO ADDRESS BOOK

ILC@FSHILL.IBM.COM ON 11/22/2000 02:17:53 PM

TO: GEORGE TEF/fishkill/IBMUS 701

CC:

SUBJECT: A NOTE FROM SYSTEM ON WED NOV 22 14:17:53 2000

----- 20001122 14:17:52 -----

702

USER = JFURBANK
 FACT = K15
 PLAN = PLAND1
 PROD = 2053PP
 STAN = 1-THRU-45
 MACH = ALL
 CATG = 55PP
 CENT = K15-A
 PRCS = ALL
 ACTN = A2 OPER_STARTS

1791 UNREAD DOCUMENT(S) REMAINING

Start VPBuddy Session A Session B Session C Session D Session E Session F
 Yahoo!N A note fro. Freelance Netscape Command Command Excel Office

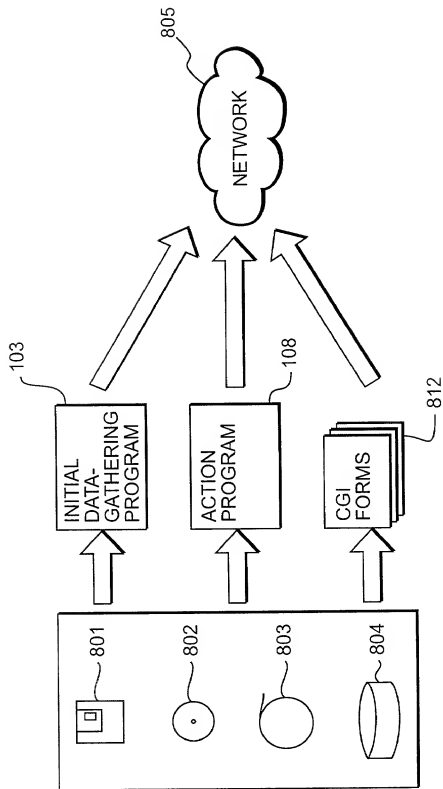


FIG. 8